


ProReact Product Catalogue

Linear Heat Detection

- ✓ ProReact Digital
- ✓ ProReact EN Digital
- ✓ ProReact Plus Digital
- ✓ ProReact VHT Digital
- ✓ ProReact Analogue
- ✓ ProReact EN Analogue
- ✓ ProReact Accessories

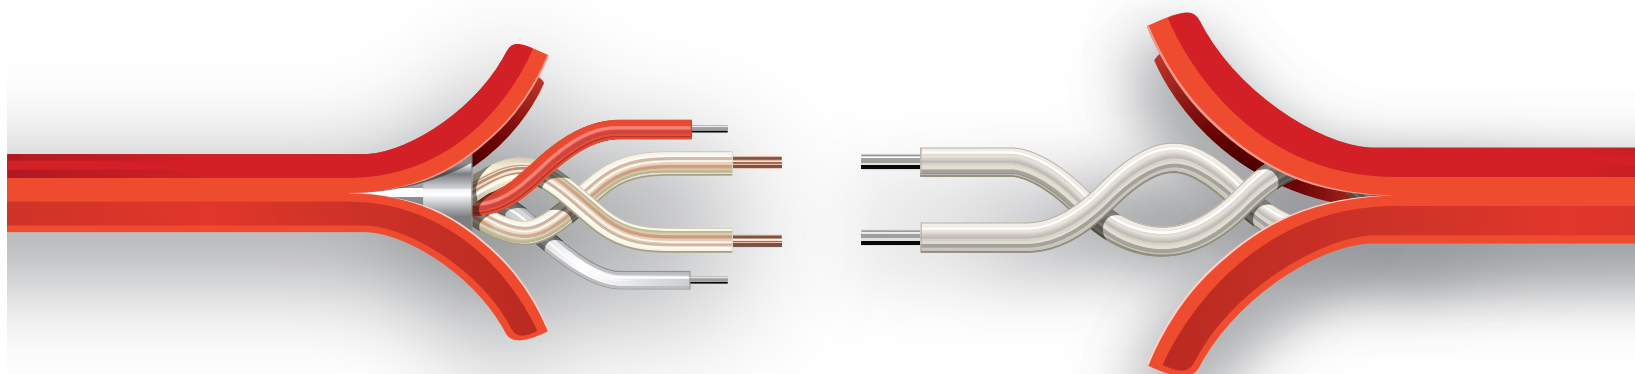

Call: +44 1274 882359
www.thermocable.com

Email: info@thermocable.com
Thermocable (Flexible Elements) Ltd,
Pasture Lane, Bradford, BD14 6LU
United Kingdom





ProReact Digital LHD – Tried and tested overhear detection

		100m Reel			200m Reel			500m Reel			1000m Reel		
Part No	Description	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm
F1065	ProReact Digital LHD 68°C PVC	2.04	2.69	Ø300 x 100	4.08	4.73	Ø300 x 100	10.20	13.00	Ø430 x 135	20.41	23.55	Ø430 x 250
F1066	ProReact Digital LHD 78°C PVC	2.04	2.69		4.08	4.73		10.20	13.00		20.41	23.55	
F1067	ProReact Digital LHD 88°C PVC	2.04	2.69		4.08	4.73		10.19	12.99		20.38	23.52	
F1068	ProReact Digital LHD 105°C PVC	1.88	2.53		3.76	4.41		9.41	12.21		18.81	21.95	
F1069	ProReact Digital LHD 185°C Nylon outer sheath	1.79	2.44		3.59	4.24		8.97	11.77		17.94	21.08	
F1070	ProReact Digital LHD 68°C Nylon outer sheath	2.64	3.29		5.28	5.93		13.21	16.01		26.42	29.56	
F1071	ProReact Digital LHD 78°C Nylon outer sheath	2.64	3.29		5.28	5.93		13.21	16.01		26.42	29.56	
F1072	ProReact Digital LHD 88°C Nylon outer sheath	2.66	3.31		5.31	5.96		13.28	16.08		26.56	29.70	
F1073	ProReact Digital LHD 105°C Nylon outer sheath	2.56	3.21		5.12	5.77		12.81	15.61		25.61	28.75	
F1074	ProReact Digital LHD 68°C Polypropylene outer sheath	2.55	3.20		5.10	5.75		12.75	15.55		25.49	28.63	
F1075	ProReact Digital LHD 78°C Polypropylene outer sheath	2.55	3.20		5.10	5.75		12.75	15.55		25.49	28.63	
F1076	ProReact Digital LHD 88°C Polypropylene outer sheath	2.50	3.15		4.99	5.64		12.48	15.28		24.97	28.11	
F1077	ProReact Digital LHD 105°C Polypropylene outer sheath	2.46	3.11		4.92	5.57		12.29	15.09		24.58	27.72	
F1078	ProReact Digital LHD 68°C Stainless steel outer braid	3.29	3.94		6.58	7.23		16.44	19.24				
F1079	ProReact Digital LHD 78°C Stainless steel outer braid	3.29	3.94		6.58	7.23		16.44	19.24				
F1080	ProReact Digital LHD 88°C Stainless steel outer braid	3.29	3.94		6.57	7.22		16.43	19.23				
F1081	ProReact Digital LHD 105°C Stainless steel outer braid	3.13	3.78		6.26	6.91		15.64	18.44				
F1082	ProReact Digital LHD 185°C Stainless steel outer braid	3.04	3.69		6.08	6.73		15.21	18.44				
A1349	ProReact Digital interface Monitor Module	673g		180 x 120 x 61									
A1343	LHD Junction Box Polycarbonate w/5 DIN Rail mounted terminals & 2 cable glands	240g		155 x 145 x 60									
A1385	ProReact Digital LHD end-of-line box with test facility	280g											




ProReact EN Digital LHD – EN54-28 certified linear heat detection

Part No	Description	100m Reel			200m Reel			500m Reel		
		Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm
F1180	ProReact EN Digital LHD Cable – 78 deg C	4.10	6.76	Ø430 x 135	8.20	10.86	Ø430 x 135	20.50	23.70	Ø430 x 250
F1181	ProReact EN Digital LHD Cable – 88 deg C	4.10	6.76		8.20	10.86		20.50	23.70	
A1397	ProReact Digital Sensor Control Unit	673g		180 x 120 x 61						
A1343	LHD Junction Box Polycarbonate w/5 DIN Rail mounted terminals & 2 cable glands	240g		155 x 145 x 60						
A1398	ProReact Digital End of Line Unit	280g								



ProReact Plus Digital LHD – Low smoke zero halogen linear heat detection

		100m Reel			200m Reel			500m Reel			1000m Reel		
Part No	Description	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm
F1124	ProReact Plus Digital LHD 65°C LSZH coating	2.28	2.93	Ø300 x 100	4.56	5.21	Ø300 x 100	11.40	14.20	Ø430 x 135	22.81	25.95	Ø430 x 250
F1125	ProReact Plus Digital LHD 75°C LSZH coating	2.28	2.93		4.56	5.21		11.40	14.20		22.81	25.95	
F1126	ProReact Plus Digital LHD 85°C LSZH coating	2.28	2.93		4.56	5.21		11.39	14.19		22.78	25.92	
F1127	ProReact Plus Digital LHD 110°C LSZH coating	2.12	2.77		4.24	4.89		10.61	13.41		21.21	24.35	
F1128	ProReact Plus Digital LHD 65°C Stainless steel outer braid on LSZH coating	3.53	4.18		7.06	7.71		17.64	20.44				
F1129	ProReact Plus Digital LHD 75°C Stainless steel outer braid on LSZH coating	3.53	4.18		7.06	7.71		17.64	20.44				
F1130	ProReact Plus Digital LHD 85°C Stainless steel outer braid on LSZH coating	3.53	4.18		7.05	7.70		17.63	20.43				
F1131	ProReact Plus Digital LHD 100°C Stainless steel outer braid on LSZH coating	3.37	4.02		6.74	7.39		16.84	19.64				
A1349	ProReact Digital interface Monitor Module	673g		180 x 120 x 61									
A1343	LHD Junction Box Polycarbonate w/5 DIN Rail mounted terminals & 2 cable glands	240g		155 x 145 x 60									
A1385	ProReact Digital LHD end-of-line box with test facility	280g											



ProReact VHT Digital LHD – Very high temperature linear heat detection

		100m Reel			200m Reel			500m Reel		
Part No	Description	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm
F1132	ProReact VHT Digital LHD Silicone	4.25	7.05	Ø430 x 135	8.50	11.40	Ø430 x 135	21.25	24.39	Ø430 x 250
F1133	ProReact VHT Digital LHD Stainless steel outer braid on Silicone	5.53	8.33		11.10	14.00		27.75	30.89	
A1349	ProReact Digital interface Monitor Module	673g		180 x 120 x 61						
A1343	LHD Junction Box Polycarbonate w/5 DIN Rail mounted terminals & 2 cable glands	240g		155 x 145 x 60						
A1385	ProReact Digital LHD end-of-line box with test facility	280g								



ProReact Analogue LHD – One cable with multiple alarm temperatures

		100m Reel			200m Reel			500m Reel		
Part No	Description	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm
F3000	ProReact Analogue LHD Cable - PVC	2.32	2.97	Ø300 x 100	4.64	7.34	Ø430 x 135	11.60	14.30	Ø430 x 135
F3003	ProReact Analogue LHD Cable - Nylon	3.26	3.91		6.52	9.22		16.30	19.60	Ø430 x 250
F3004	ProReact Analogue LHD Cable - Polypropylene	2.99	3.64		5.98	8.68		14.95	18.25	
F3005	ProReact Analogue LHD Cable - Stainless Steel outer braid on PVC	3.52	4.17		7.04	9.74		17.60	20.90	
F3007	ProReact Analogue LHD Cable - Stainless Steel outer braid on Nylon	4.54	5.19		9.08	11.78		22.70	26.00	
A1162	ProReact Analogue Control Unit - Self-Programmable inc. EOL unit	1116g		225 x 210 x 110						
A1163	ProReact Analogue Control Unit - Laptop-Programmable inc. EOL unit	1021g								
A1343	LHD Junction Box Polycarbonate w/5 DIN Rail mounted terminals & 2 cable glands	240g		155 x 145 x 60						
A1129	ProReact Analogue End-of-line Unit	156g								



ProReact EN Analogue LHD – EN54-22 certified linear heat detection

Part No	Description	100m Reel			250m Reel			500m Reel		
		Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm	Net Kgs	Gross Kgs	Dimms mm
F3050	ProReact EN Analogue PVC Coated Sensor Cable	2.47	3.12	Ø300 x 100	6.18	8.84	Ø430 x 135	12.35	15.60	Ø430 x 250
A1388	ProReact EN Analogue Composite Control Unit and ProReact EN Analogue End-of-line Unit	1062g		225 x 210 x 110						
A1389	ProReact EN Analogue Composite Control Unit	948g								
A1471	ProReact EN Analogue Junction Box	240g		155 x 145 x 60						
A1470	ProReact EN Analogue End-of-line Unit	156g								

Other reel sizes are available upon request.

ProReact Accessories

Part No	Description	Material	Silicone Sleeves Included	Per Pack				
				Net Wt (g)	Gross Wt (g)	Length (mm)	Width (mm)	Height (mm)
A1326-025	Pipe Clip Zintec (Pack of 25)	Zintec	✓	840	850	260	260	135
A1326-100	Pipe Clip Zintec (Pack of 100)	Zintec	✓	3390	3400	260	260	135
A1327-025	Pipe Clip Stainless Steel (Pack of 25)	Stainless Steel	✓	570	580	260	260	135
A1327-100	Pipe Clip Stainless Steel (Pack of 100)	Stainless Steel	✓	2290	2300	260	260	135
A1170-025	Distance Extension Piece Zintec (Pack of 25)	Zintec	✓	1090	1100	190	260	50
A1170-100	Distance Extension Piece Zintec (Pack of 100)	Zintec	✓	4440	4450	190	260	50
A1171-025	Distance Extension Piece Stainless Steel (Pack of 25)	Stainless Steel	✓	790	800	190	260	50
A1171-100	Distance Extension Piece Stainless Steel (Pack of 100)	Stainless Steel	✓	3190	3200	190	260	50
A1166-025	Standard L-Clip (50mm) Zintec (Pack of 25)	Zintec	✓	390	400	190	260	50
A1166-100	Standard L-Clip (50mm) Zintec (Pack of 100)	Zintec	✓	1590	1600	190	260	50
A1167-025	Standard L-Clip (50mm) Stainless Steel (Pack of 25)	Stainless Steel	✓	250	260	190	260	50
A1167-100	Standard L-Clip (50mm) Stainless Steel (Pack of 100)	Stainless Steel	✓	1040	1050	190	260	50
A1164-025	Dual Height L-clip (100mm) Zintec (Pack of 25)	Zintec	✓	640	650	220	260	70
A1164-100	Dual Height L-clip (100mm) Zintec (Pack of 100)	Zintec	✓	2590	2600	220	260	70
A1165-025	Dual Height L-clip (100mm) Stainless Steel (Pack of 25)	Stainless Steel	✓	400	410	220	260	70
A1165-100	Dual Height L-clip (100mm) Stainless Steel (Pack of 100)	Stainless Steel	✓	1640	1650	220	260	70
A1168-025	LHD L-Bracket 200mm Zintec (Pack of 25)	Zintec	✓	1190	1200	260	260	90
A1168-100	LHD L-Bracket 200mm Zintec (Pack of 100)	Zintec	✓	4790	4800	260	260	90
A1169-025	L-Bracket 200mm Stainless Steel (Pack of 25)	Stainless Steel	✓	790	800	260	260	90
A1169-100	L-Bracket 200mm Stainless Steel (Pack of 100)	Stainless Steel	✓	3190	3200	260	260	90
A1172-025	Channel Bracket Zintec (Pack of 25)	Zintec	✓	840	850	260	260	135
A1172-100	Channel Bracket Zintec (Pack of 100)	Zintec	✓	3390	3400	260	260	135
A1173-025	Channel Bracket Stainless Steel (Pack of 25)	Stainless Steel	✓	570	580	260	260	135
A1173-100	Channel Bracket Stainless Steel (Pack of 100)	Stainless Steel	✓	2290	2300	260	260	135
A1174-025	V-clip for cable trays Spring Stainless Steel (Pack of 25)	Spring Stainless Steel	✓	570	580	260	260	135
A1174-100	V-clip for cable trays Spring Stainless Steel (Pack of 100)	Spring Stainless Steel	✓	2340	2350	260	260	135
A1344-025	Beam Clip 2-3mm (Pack of 25)	Spring Steel		375	425	132	132	194
A1344-100	Beam Clip 2-3mm (Pack of 100)	Spring Steel		1550	1600	132	132	194
A1178-025	Beam Clip 3-8mm (Pack of 25)	Spring Steel		400	450	132	132	194
A1178-100	Beam Clip 3-8mm (Pack of 100)	Spring Steel		1650	1700	132	132	194
A1328-025	Beam Clip 8-14mm (Pack of 25)	Spring Steel		400	450	132	132	194
A1328-100	Beam Clip 8-14mm (Pack of 100)	Spring Steel		1650	1700	132	132	194
A1179-025	Beam Clip 14-20mm (Pack of 25)	Spring Steel		400	450	132	132	194
A1179-100	Beam Clip 14-20mm (Pack of 100)	Spring Steel		1650	1700	132	132	194
A1362-025	P-clip Aluminium(Pack of 25)	Aluminium	✓	40	55	160	110	30
A1362-100	P-clip Aluminium(Pack of 100)	Aluminium	✓	195	205	190	260	50
A1329-025	P-clip Stainless Steel (Pack of 25)	Stainless Steel	✓	85	100	160	110	30
A1329-100	P-clip Stainless Steel (Pack of 100)	Stainless Steel	✓	340	355	190	260	50
A1175-025	110°C constant rated indoor/outdoor tie wrap (Pack of 25)	PA66		10	15	160	110	20
A1175-100	110°C constant rated indoor/outdoor tie wrap (Pack of 100)	PA66		50	55	160	110	20
A1176-025	170°C constant rated indoor tie wrap (Pack of 25)	ETFE		10	15	160	110	20
A1176-100	170°C constant rated indoor tie wrap (Pack of 100)	ETFE		50	55	160	110	20
A1177-025	High Temperature Stainless Steel Indoor/Outdoor tie wrap (Pack of 25)	Stainless Steel		50	60	220	125	20
A1177-100	High Temperature Stainless Steel Indoor/Outdoor tie wrap (Pack of 100)	Stainless Steel		200	210	220	125	20
A1342	Stainless Steel Tie Wrap Hand Tool	N/A		600	600	280	200	55
C1283-025	High Temperature Silicone Sleeves (Pack of 25)	Silicone		10	12	140	10	100
C1283-100	High Temperature Silicone Sleeves (Pack of 100)	Silicone		40	42	140	15	100

Weights and dimensions provided are approximate. Technical drawings of all products presented are available upon request.



Call: +44 1274 882359
www.thermocable.com

Email: info@thermocable.com
Thermocable (Flexible Elements) Ltd,
Pasture Lane, Bradford, BD14 6LU
United Kingdom

