


ProReact Fixed Temperature Activation (UL) (Digital) Linear Heat Detection (LHD)

Tried And Tested Linear Overheat Detection

The **ProReact** range of fixed temperature activation – or digital – linear heat detection cables is designed to trigger a response when a specific temperature is reached. If the temperature surrounding the cable reaches the activation temperature the two cores quickly come into contact and trigger an alarm. These cables are known as ‘digital’ because they are ‘off’ below the activation temperature and irreversibly switch ‘on’ when the activation temperature is reached.

ProReact Fixed Activation LHD

Thermocable is a UK based world leading manufacturer of cable based sensing and detection technologies with established global sales. The technology uses a twisted pair of low resistance, tri-metallic conductors, sheathed in advanced temperature sensitive polymers. Full product traceability is guaranteed as the entire manufacturing process is carried out at Thermocable’s UK HQ.

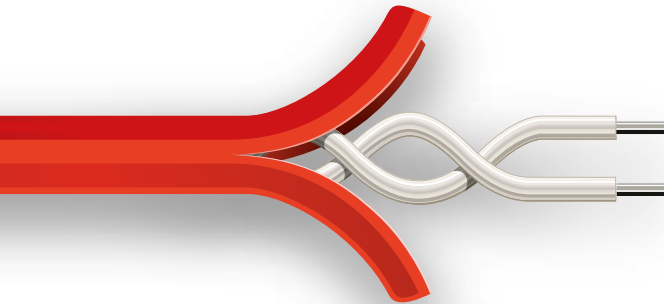

Detector Action Temperatures

- 68°C (155°F)
- 78°C (172°F)
- 88°C (190°F)
- 105°C (220°F)
- 185°C (365°F)

ProReact Fixed Activation Interface Monitor Module

Thermocable’s ProReact Fixed Activation Interface Monitor Module is designed to enhance the functionality of existing or new fixed activation LHD systems. The UL864 10th Edition approved module monitors up-to two zones of LHD cable. A unique interlock/coincidence detection mode eliminates the possibility of false alarms by requiring both LHD cables to trigger before an alarm is transmitted.



Benefits

- UUL, CE, RoHS approved to meet end user specifications
- Low Material Costs
- Cable based sensing allows detection at the point of risk
- Short manufacturing lead time assures product availability and speed to market
- Low installation, maintenance and repair costs reduce total cost of ownership
- Reliability through design, approvals and 3 year warranty
- Quickly locate and respond to an incident with the optional ProReact Fixed Activation Interface Monitor Module (DiMM)

Typical Markets and Applications

- Power generation industries
- Oil and gas industries
- Mines
- Cold storage and industrial freezers
- Floating roof storage tanks
- Tunnels
- Cable trays
- Warehousing



Call: +44 1274 882359
www.thermocable.com

Email: info@thermocable.com
Thermocable (Flexible Elements) Ltd,
Pasture Lane, Bradford, BD14 6LU
United Kingdom

